



CRANK-OUT CANTILEVER WORKSHEET

RACK ENGINEERING DIVISION (RED)

PRODUCT DESCRIPTION

Depth _____

Width _____

Height _____

Weight _____

Length of material _____

Number of levels _____

Level capacity _____

Arm depth _____

Use-able space needed between levels _____

Single sided _____ Double sided _____

Floor space available _____

Ceiling height _____

Height below crane hook _____

Notes _____

CONTACT

Company _____

Contact _____

Phone Number _____

Email _____

Quote Date _____

Today's Date _____

OPTIONS & ACCESSORIES

- Intermediate support (up to 20' long)
- Stock dividers (all welded or adjustable)
- UHMW lined arms
- Custom colors
- Single or double sided units



CRANK-OUT CANTILEVER WORKSHEET



RACK ENGINEERING DIVISION (RED)

SPECIFICATIONS

GENERAL

Levels	20" Deep Arms		24" Deep Arms		30" Deep Arms		36" Deep Arms	
	12"	15"	12"	15"	12"	15"	12"	15"
3-Levels	83 1/2"	95 1/2"	83 1/2"	95 1/2"	83 1/2"	95 1/2"	83 1/2"	95 1/2"
4-Levels	105 1/2"	120 1/2"	105 1/2"	120 1/2"	105 1/2"	120 1/2"	105 1/2"	120 1/2"
5-Levels	127 1/2"	145 1/2"	127 1/2"	145 1/2"	127 1/2"	145 1/2"	127 1/2"	145 1/2"
6-Levels	149 1/2"	170 1/2"	149 1/2"	170 1/2"	149 1/2"	170 1/2"	149 1/2"	170 1/2"
7-Levels	171 1/2"	195 1/2"	171 1/2"	195 1/2"	171 1/2"	195 1/2"	171 1/2"	195 1/2"
8-Levels	193 1/2"	220 1/2"	193 1/2"	220 1/2"	193 1/2"	220 1/2"	193 1/2"	220 1/2"
Depth	62"		70"		82"		94"	
Capacity	6,600 lbs. per arm		5,600 lbs. per arm		4,800 lbs. per arm		4,200 lbs. per arm	

* Each upright has a 20,000 lbs. capacity stationary top

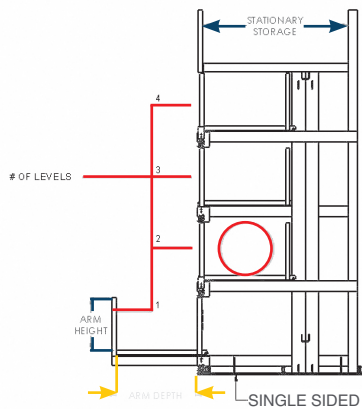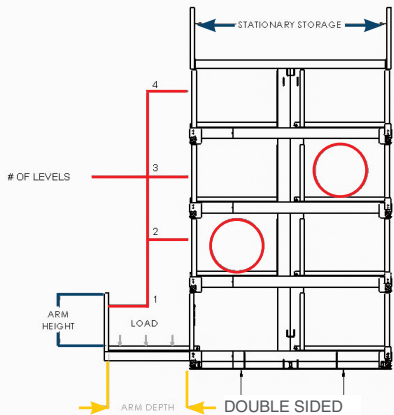

PART NUMBER EXAMPLE

CC - 4 - 3 - 24 - 15 - 20

Crank-Out Cantilever
 Number of crank-out arm levels (Quantity: 1, 2, 3, 4, 5, 6, 7, 8)
 *Number of uprights (Quantity: 1, 2, 3, 4)
 Usable arm depth (20", 24", 30", 36")
 Usable arm height (Available in lengths 8" to 24" in 1" increments)
 Length of material being stored (Available in lengths 8" to 24" in 1" increments)